Far Out

Moonn Electronics

Use me to build a version of the Parallel Universe by Experimentalists Anonymos

Hi there!
Thank you for building me!

EEEAAAKKKK!!!
SHHENNOOOHHHHH!!!
KRRRKKYYYKKYK!!!

If you have any questions or anything else to say, just write an email to
moonnelectronics@gmail.com

Have a nice day!

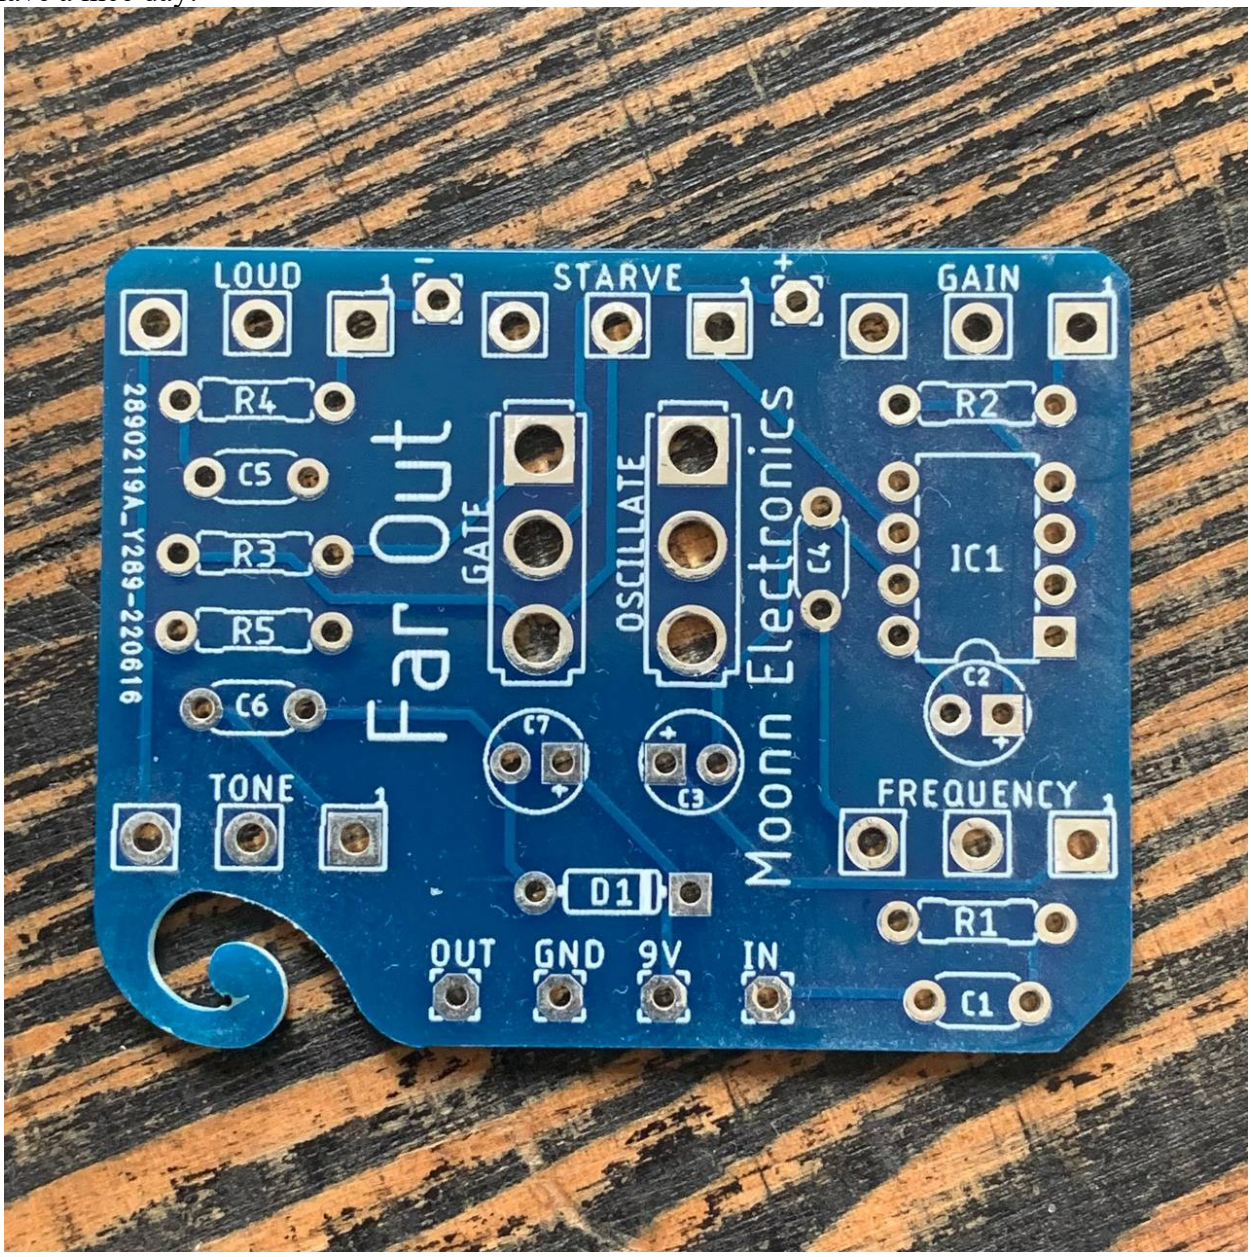

Moonn Electronics is in no way affiliated with Experimentalists Anonymos

Bill of Materials

Qty	Value	Parts
Resistors		
1	390R	R2
1	2K2	R3
1	22K	R5
2	2M2	R1, R4
Film Capacitors		
1	47n	C6
3	100n	C1, C4, C5
Electrolytic Capacitors		
2	10u	C2, C3
1	100u	C7
Semiconductors		
1	1N4001	D1
1	LM386	IC1
Switches and Potentiometers		
2	SPDT OnOn	OSCILLATE, GATE
1	B1K	STARVE
1	B5K	FREQUENCY
1	B10K	TONE
1	A100K	LOUD
1	C100K	GAIN

Schematic

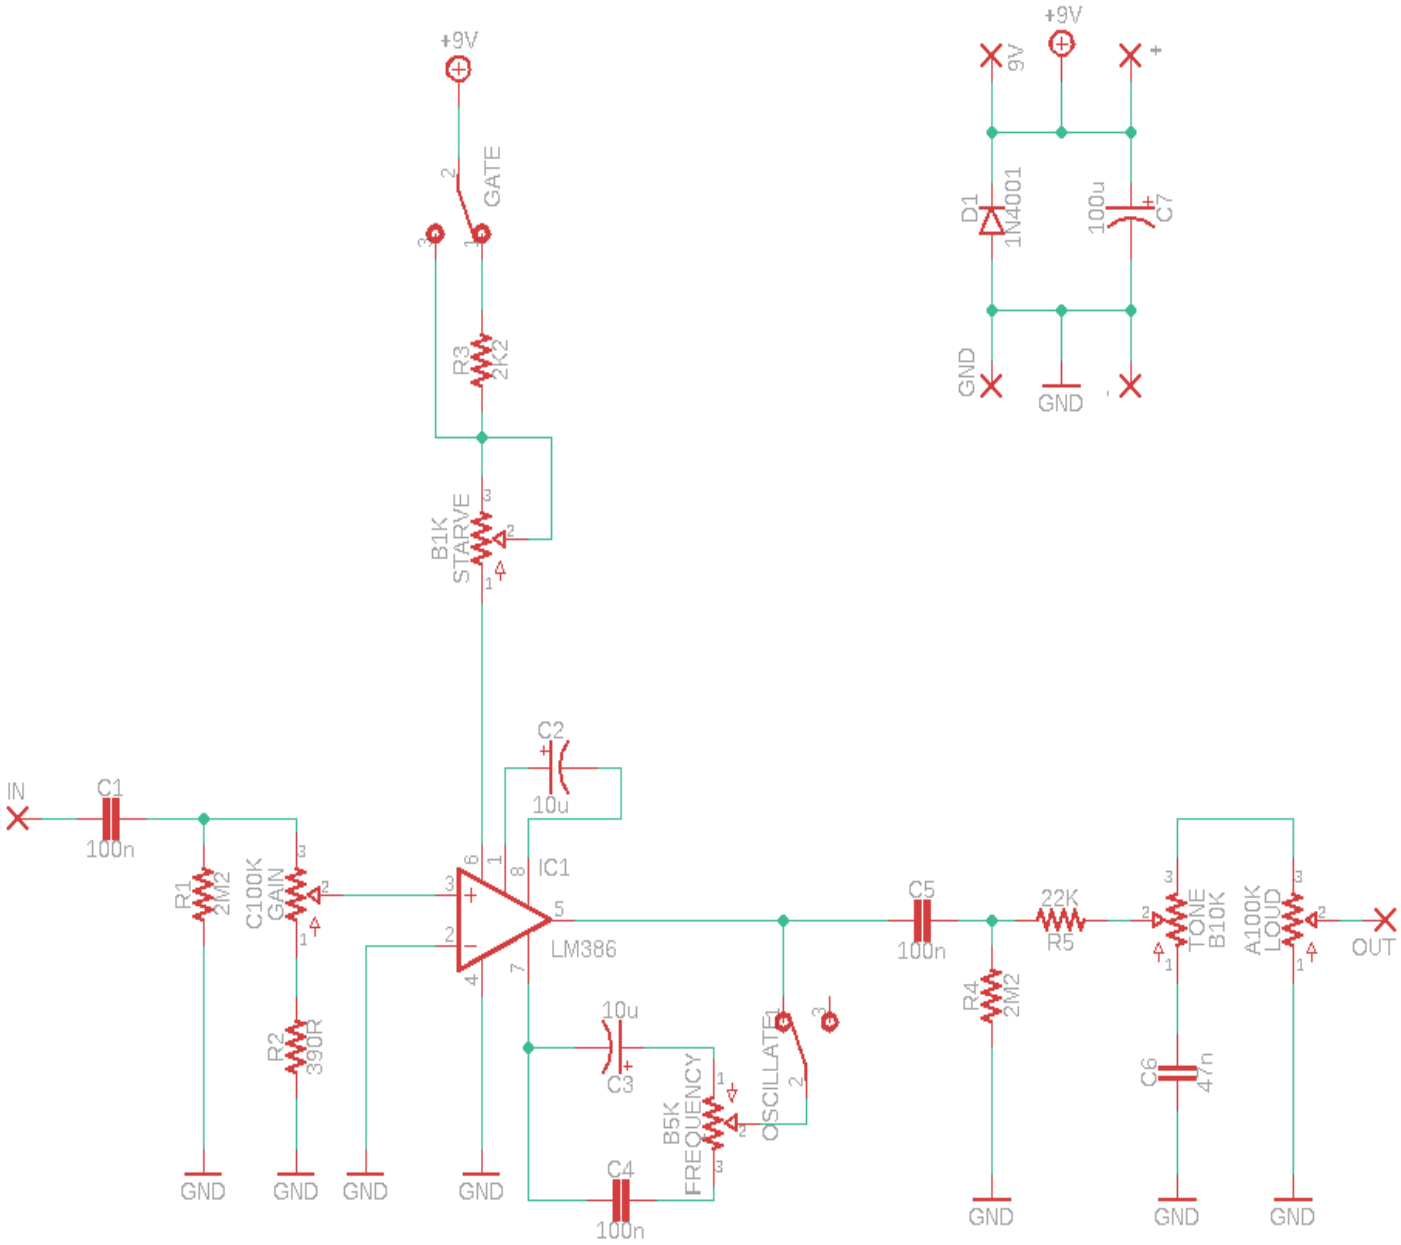
+9V
GATE
R3
2K2
B1K
STARVE
C2
10u
IC1
LM386
IN
C1
100n
R1
2M2
C100K
GAIN
R2
390R
C3
10u
B5K
FREQUENCY
OSCILLATE
C4
100n
C5
100n
22K
R5
R4
2M2
A100K
LOUD
TONE
B10K
C6
47n
OUT
GND
+9V
9V
D1
1N4001
100u
C7
GND

Offboard Wiring